



5DA39450 Silver metallic

Variant:

Operating and power:

Comfort:

Environment and safety:

Technical information:

Measures:

- Energy Efficiency Class: A
- Average Energy Consumption: 20 kWh/year
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A
- Grease Filtering Efficiency Class: C
- Noise min./max. Normal Level: 53/60 dB
- Slimline extractor hood
- 90 cm wide
- For installation in a special wall cupboard (60 or 90 cm)
- Suitable for ducted or re-circulated extraction
- For recirculated extraction recirculating kit (accessory) needed
- Electronic controls
- Extraction rate 4 step (3 speeds plus intensive setting), adjustable through Push button controls with Electronic display
- Automatic revert setting, 6 minutes
- Automatic 10 minutes after running
- Efficient BLDC-technology
- Drawer without handle, furniture lighting pelmet or profile panel required
- Bright illumination with 2 x 3W LED modul
- Light Intensity: 569 lux
- Colour Temperature: 3500 K
- Light Colour: neutral white
- Metal grease filter, dishwasher safe
- Air volume according to EN 61591:

extraction rate:

max. normal use 270 m³/h, intensive 420 m³/h

recirculating rate:

max. normal use 160 m³/h, intensive 180 m³/h

- Noise level according to EN 60704-3 und EN 60704-2-13

Extraction rate:


Max. normal use: 60 dB(A) re 1 pW (46 dB(A) re 20 µPa sound pressure)

Intensive: 70 dB(A) re 1 pW (56 dB(A) re 20 µPa sound pressure)

Recirculating rate:

Max. normal use: 70 dB(A) re 1 pW (56 dB(A) re 20 µPa sound pressure)

Intensive: 71 dB(A) re 1 pW (57 dB(A) re 20 µPa sound pressure)

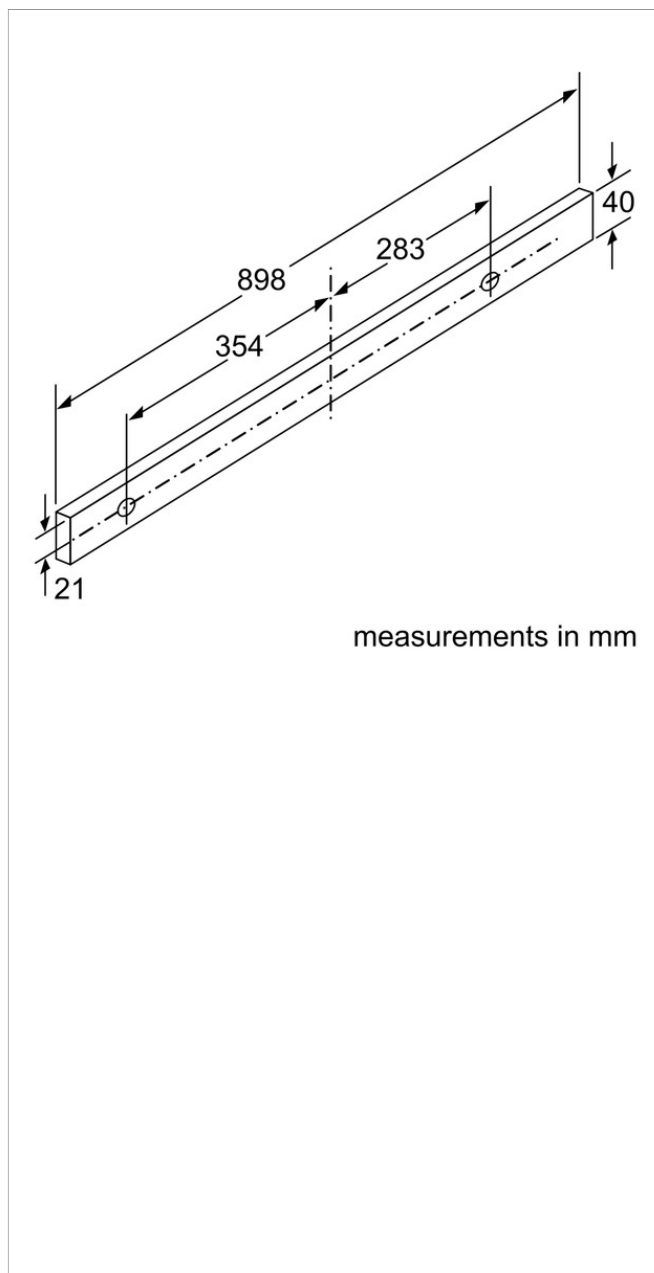

Characteristics

Typology: Pull-out
 Approval certificates: CE, VDE
 Length electrical supply cord (cm): 175
 Required niche size for installation (HxWxD): 162mm x 526mm x 290mm
 Net weight (kg): 11.0
 Type of control: Electronic
 Number of speed settings: 3
 Maximum output air extraction (m³/h): 270
 Boost position output recirculating (m³/h): 180
 Maximum output recirculating air (m³/h): 160
 Boost position air extraction (m³/h): 420
 Number of lights: 2
 Noise level (dB): 60
 Diameter of air outlet (mm): 150 / 120
 Grease filter material: Washable aluminium
 Odour filter: No
 Operating Mode: Convertible
 Delay Shut off modes: 10M
 Optional accessories: 5Z5145X5, 5Z5790N0
 Type of lamps used: LED
 Total power of the lamps (W): 6
 Grease filter type: Kassette

Consumption and connection features

Connection Rating (W): 76
 Current (A): 10
 Voltage (V): 220-240
 Frequency (Hz): 50; 60
 Plug type: Gardy plug w/ earthing
 Installation typology: Half-integrated
 Universal Product Code:
 Material body: zinc plated
 Approval certificates: CE, VDE
 Length of electrical supply cord (in):
 Plug type: Gardy plug w/ earthing
 Dimensions of the product, with chimney (if exists) (in): / x x
 Dimensions of the packed product (in): 12.20 x 37.00 x 13.97
 Height of the chimney (in):
 Vertical rise height:
 Required distance above cooktop/ranges:
 Net weight (lbs): 24
 Gross weight (lbs): 27
 Motor location: Integrated motor in hood body
 Maximum output recirculating air (CFM):
 Diameter of air duct (in) top:
 Diameter of air duct (in) back:
 Discharge direction:
 No-return airflow flap: No